



■ Features

- 7.0 x 1.5 x 1.4 MAX. mm of surface mounted Tuning Fork
- Excellent reliability characteristics such as heat and mechanical shock.
- Pb-free and satisfy RoHs requirements.
- Reflow soldering is available.




■ Applications

Digital Electronics, Consumer Products and Mobile Communications


■ Specifications

Frequency	32.768 kHz
Frequency tolerance at 25°C	±10, ±20 ppm
Load capacitance	6, 7, 9, 12.5 pF
Operating temperature range	-40 ~ +85 °C
Storage temperature range	-55 ~ +125 °C
Peak temperature	25±5 °C
Temperature coefficient	-0.04 ppm/°C ² Max.
Equivalent series resistance	65 kΩ Max.
Drive level	1.0 μW Max.
Aging at 25°C	±3 ppm / year Max.
Shunt capacitance	0.8 pF Typ.

■ Dimensions (unit: mm)

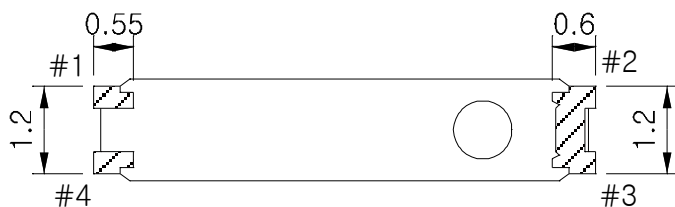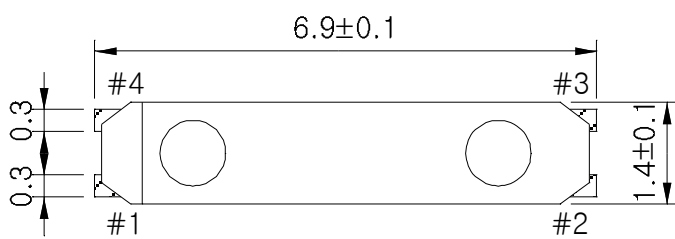

■ Connection Diagram (Top View)

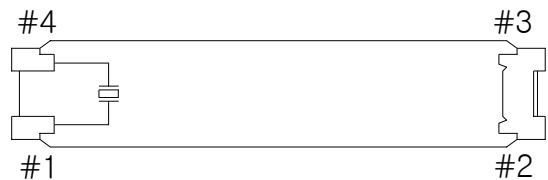

Pin	Function
#1	Xtal Terminal (Input)
#2	N/C
#3	N/C
#4	Xtal Terminal (Output)

■ Land pattern (unit: mm)

